



23-24-111545

## Runnymede Refurb of 4 no. Independent Retirement Living Homes Feasibility Report

Beomonds

Photo:  
Darley Dene Court



Hamson Barron Smith Architects  
Hayworthe House, Market Place  
Haywards Heath, RH16 1DB 01444 449400  
[hamsonbarronsmith.com](http://hamsonbarronsmith.com)

COPYRIGHT NOTICE  
This document is issued for the benefit of the party which commissioned it and only for the specific purposes connected with that commission. It should not be relied upon by any other party or used for any other purpose whatsoever and no liability is accepted for such use. This document contains confidential information and proprietary intellectual property. It should not be copied, distributed or shared with third parties (in whole or in part and in any format) without our prior written consent.  
© Hamson Barron Smith Ltd (NPS) - January 2021

## Contents

### 1.0 INTRODUCTION

- 1.1 Engagement
- 1.2 Objectives
- 1.3 The Team
- 1.4 Methodology
- 1.5 Client briefing

### 2.0 CONCEPT STRATEGY

- 2.1 Material Considerations
- 2.2 Furniture Fittings and Equipment Considerations
- 2.3 Landscape design

### 3.0 SITE ANALYSIS/ PROPOSALS

- 3.1 Grove Court Plans  
Site Photos
- 3.2 Floral House Plans  
Site Photos
- 3.3 Darley Dene Court Plans  
Site Photos
- 3.4 Beomonds Site Photos

### 4.0 THE WAY FORWARD

- 4.1 Conclusions
- 4.2 Recommendations and next steps

Issue of Draft:  
Final Issue:  
Report prepared by:

22/02/22  
Alastair Paxton - Architect  
Hamson Barron Smith

Checked by:

Trevor Baker - Associate Architect  
Hamson Barron Smith

## 1.1 Engagement

This document has been produced by HBS to set out a summary of the key issues and requirements for the upgrade and refurbishment of four Independent Retirement Living homes run by Runnymede Borough Council. The IRL schemes are as below:

Grove Court, Egham  
Floral House, Surrey  
Darley Dene Court, Surrey  
Beomonds, Chertsey

HBS was appointed by Faithful & Gould as a supply chain partner for Runnymede Borough Council and have had a number of meetings with the client and undertaken a site visit. HBS has prepared a number of options for discussion with the client and further scheme development.

## 1.2 Objectives

This report aims to provide Runnymede Borough Council with a considered understanding of the opportunities and constraints of all four care homes and a clear development strategy for the proposed upgrade and refurbishment based on an in depth analysis of existing and proposed needs to ensure the most efficient and effective outcomes are recommended.

## 1.3 The Team

The team for this commission included:

### Runnymede Borough Council

### Faithful & Gould

#### Consultant Team - Hamson Barron Smith:

Trevor Baker	Associate Architect
Alastair Paxton	Architect
Ryan Skinner	Mechanical Engineer
Tim Carden	Electrical Engineer
Rob Fuse	Structural Engineer

#### Sub Contractor

Gareth Bartlett Fire Engineering

## 1.4 Methodology

Design team members have visited the sites to understand the IRL homes and findings have informed proposals.

The study provides possible enhancement options and a clear development rationale for the proposed works.

The methodology for this RIBA Stage 0 study included:

- An initial commission briefing from Runnymede Borough Council.
- Prepare Client Requirements
- Develop Business Case for feasible options including review of Project Risks and Project Budget
- Ratify option that best delivers Client Requirements
- Review Feedback from previous projects
- Undertake Site Appraisals

## 1.5 Client Briefing

The brief has been prepared by Runnymede Borough Council (RBC) who have consulted with the residents of the IRL's to come up with a new vision for their Independent Retirement Living accommodation.

One of the key objectives is to address the lack of interest in the current IRL schemes which is due to a number of reasons including smaller bedsit/accommodation.

Considering the predicted changes in demographics will see the number of older people increase significantly over the next 20 years RBC would like to make their schemes attractive to the housing applicants by providing first class older persons accommodation with modern facilities, that is highly sought after.

It is believed this could be achieved by upgrading and refurbishing a number of communal areas and upgrading a number of services in the individual schemes to make them feel more modern. Additionally upgrading decoration/furniture and outdoor spaces. The key areas are highlighted below:

### Reception

- Modern - hotel style, Spacious Welcoming, Accessible entry
- Integrating the staff office

### Communal lounge

- Welcoming and bright, Café space, TV room separate
- Some multi-functional space

### Communal Kitchens

### Hallways

- Decoration and carpets in communal areas, Refreshed signage

### Gardens / Outdoor space

- Year round use, Less purely grassed area, Outdoor social space + -- seating areas, Modern paths, Lifted planters, More lighting, Covered space

### New lightings in external and internal areas

### New video door entry system

### Alarm call system

- I'm OK facility, WIFI throughout the scheme, Digital voice calling within and outside the scheme, Links to door entry system, Modern wrist and neck pendants, Alarm call made from anywhere within the scheme – and will be located, Reassurance lighting at alarm call box
- Live notice boards

### New fire and warden call system

### Other facilities

- Upgraded guest room, Laundry rooms, Mobility scooter storage Improved drying areas

### Branding

Runnymede Borough Council also want to create a Runnymede brand across all homes to enables some uniformity but with local variation.

It is hoped that the upgrades and refurbishment will help to achieve some of the key objectives of our new Older Persons Strategy under which RBC are committed to providing the following facilities:-

1. Dementia friendly communal areas with modern, welcoming reception areas
2. Café style lounges with links into the wider community
3. Outdoor areas that are engaging, dementia friendly and encourage social interaction
4. Schemes equipped with modern, digitally enabled technology
5. Provision of modern 'other' facilities including mobility scooter storage, guest and laundry rooms

## 2.0 CONCEPT - INTERIOR ENHANCEMENTS

RIBA Stage 0 Report

### 2.1 Material Considerations


**Wall Finishes:** Redecorate throughout in accordance with the correct colour contrast LRV requirements for those who are visually impaired and to provide Dementia friendly environment.

Develop a base palette which can be used throughout all future homes with the option of accent colours to help with wayfinding and orientation within the building based around the theme of nature.


Applying an accent colour per wing provides identity and definition that residents can relate to. It can be limited in its use to avoid becoming overbearing, but will provide wayfinding and landmark identity as to which wing you are in.



**Feature Wall:** Provides focus to a communal area by providing a feature wall with a textured wall covering and combined with a fireplace or display unit to give a central point in the space.

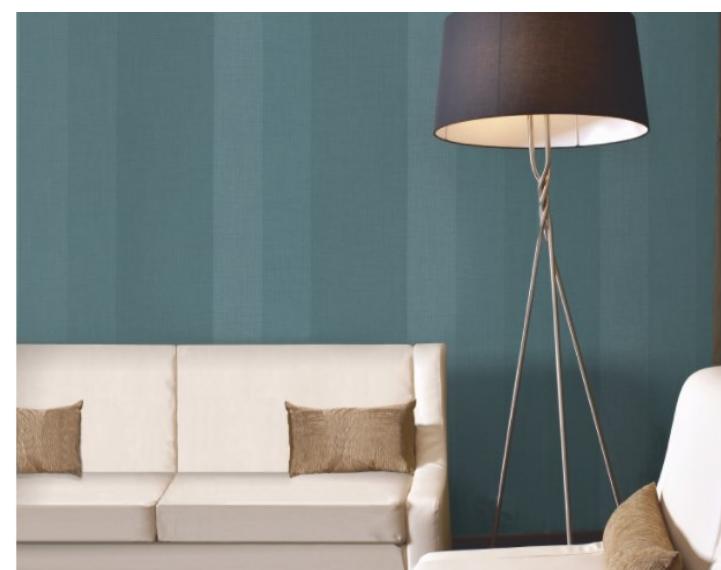

**Lighting Considerations:** Proficient lighting should be provided if there is no natural light available. Spaces should be well lit with both overhead and wall lighting.

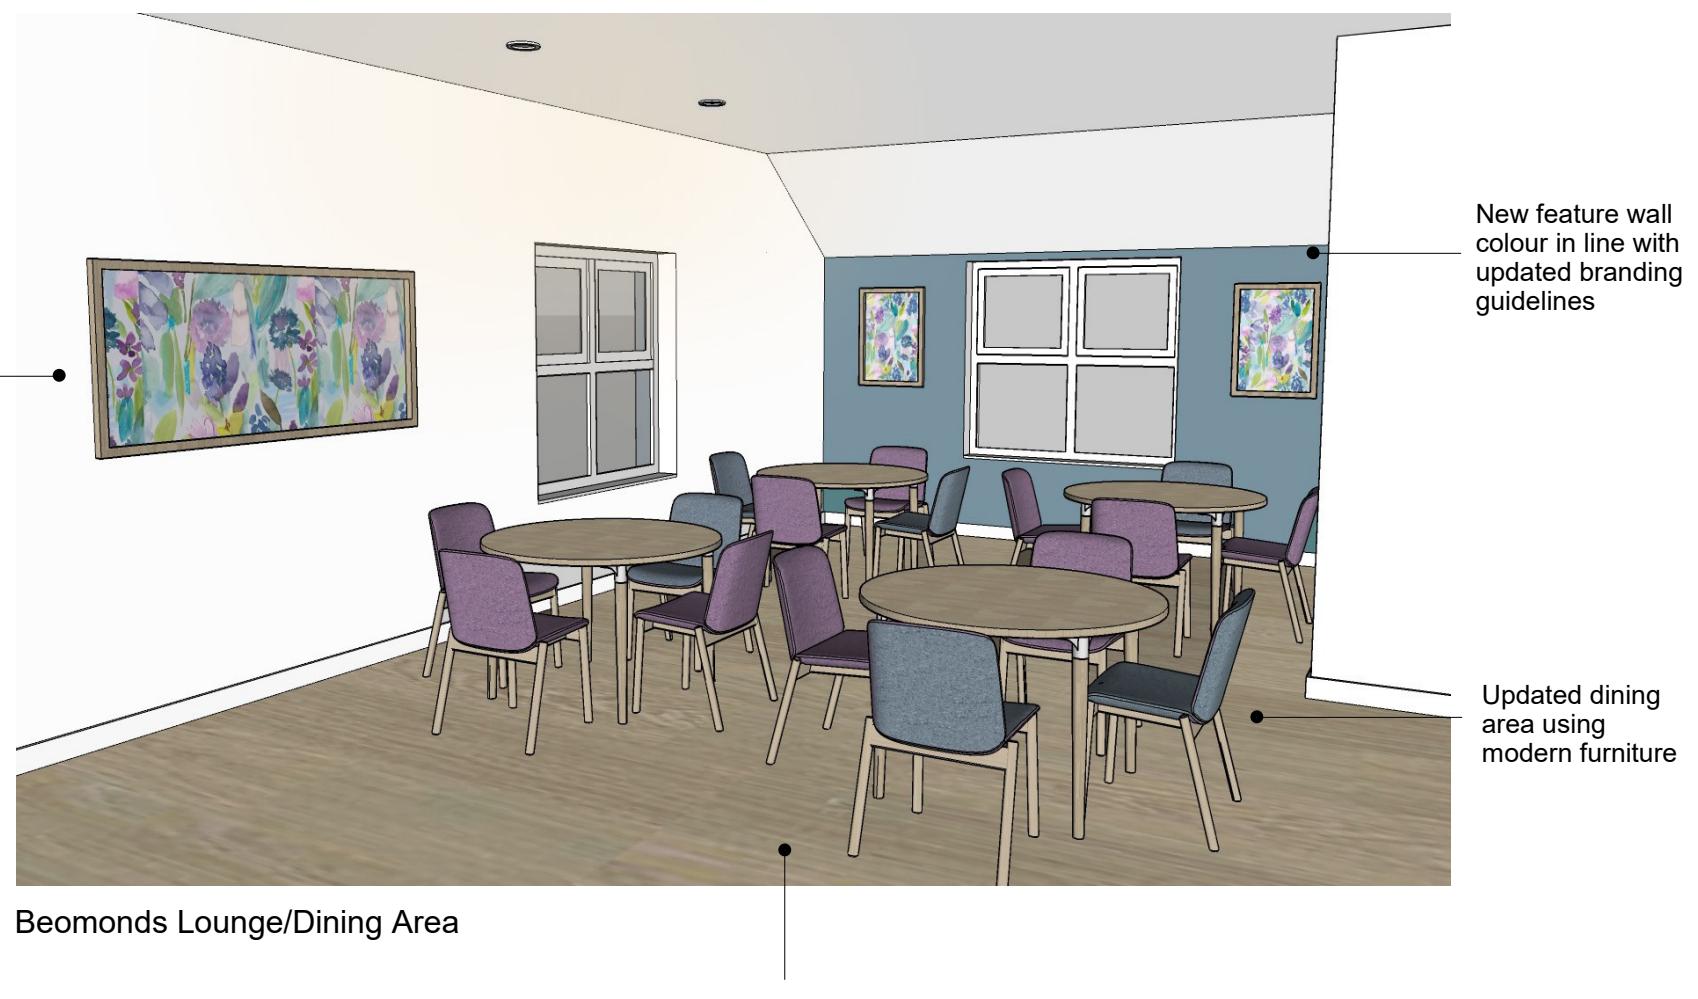

**Floor Finishes:** Upgrade to a modern luxury wood effect vinyl and suitable Dementia friendly carpets with consideration to providing suitable threshold profiles to reduce trips and falls.

**Door Finishes:** Remove dark doors and handrails and replace with a light timber finish to provide more of a domestic and warm feel. Bedroom doors can be painted to suit a colour theme and in accordance with the correct colour contrast LRV requirements for those who are visually impaired and to assist in providing Dementia friendly environment.



## 2.0 CONCEPT- INTERIOR ENHANCEMENTS

## RIBA Stage 0 Report

### 2.2 Furniture Fittings and Equipment Considerations

**Furniture:** Using modern non institutional chairs, tables and display units will provide a classic timeless aesthetic to communal areas. Selected upholstery fabrics should be robust and easily cleanable with the correct fire ratings for use in a communal setting which are appealing and tactile for residents to enjoy.



**Textiles:** Provide soft furnishings and window treatments which are robust and suitably selected to be Dementia friendly in terms of patterning and textures but equally adding to the feel of a modern and interesting interior.



**Signage:** Develop a clear signage and way finding strategy which includes

- Pictorial interpretation of room usage
- Large bold text
- Good contrast between lettering and background
- Fixed to door rather than wall
- Fixed at lower height of 1.2m



**Artwork:** Provide points of interest and meaningful reminiscence in communal areas and along any long stretches of corridors. Ensure this is done without creating a cluttered feel including providing pictures and artwork to create focal points within display units or open shelving. Themes can work well and are easily changeable if quick release frames are purchased. Consider themes such as local history/places of interest or nature and seasons.



### 2.3 Landscape Design

The external environment associated with each IRL facility is considered a key component of the wider upgrade and refurbishment works. Visually attractive and cohesive garden spaces are seen as a major factor in providing a more attractive housing option to potential future residents.


Further to this, upgrades and refurbishments to external areas are expected to achieve some of the key objectives of the new RBC Older Persons Strategy. In particular outdoor spaces must be engaging, dementia friendly and encourage social interaction. Site entrances must be welcoming and reflect the Runnymede brand whilst retaining specific local community links. Where possible, external areas may also be equipped with modern, digitally enabled technology such as access control measures. External spaces must also allow for the site to function seamlessly with all necessary external storage provided, including mobility scooter storage.

Key design considerations that will be explored and developed across all IRL facilities include the following:

- Allowing for year-round and all-weather use.
- Moving away from a reliance on expansive grassed spaces.
- Provision of outdoor social spaces incorporating general seating and dining areas.
- Provision of accessible paths (incorporating mobility scooter manoeuvrability) paved in high quality robust and sustainable materials.
- Provision of raised planters of varying heights to allow for active gardening.
- Provision of well light external spaces.
- Provision of covered external space to allow for shade and inclement weather protection.



IMPROVED COMMUNAL GARDEN SPACE

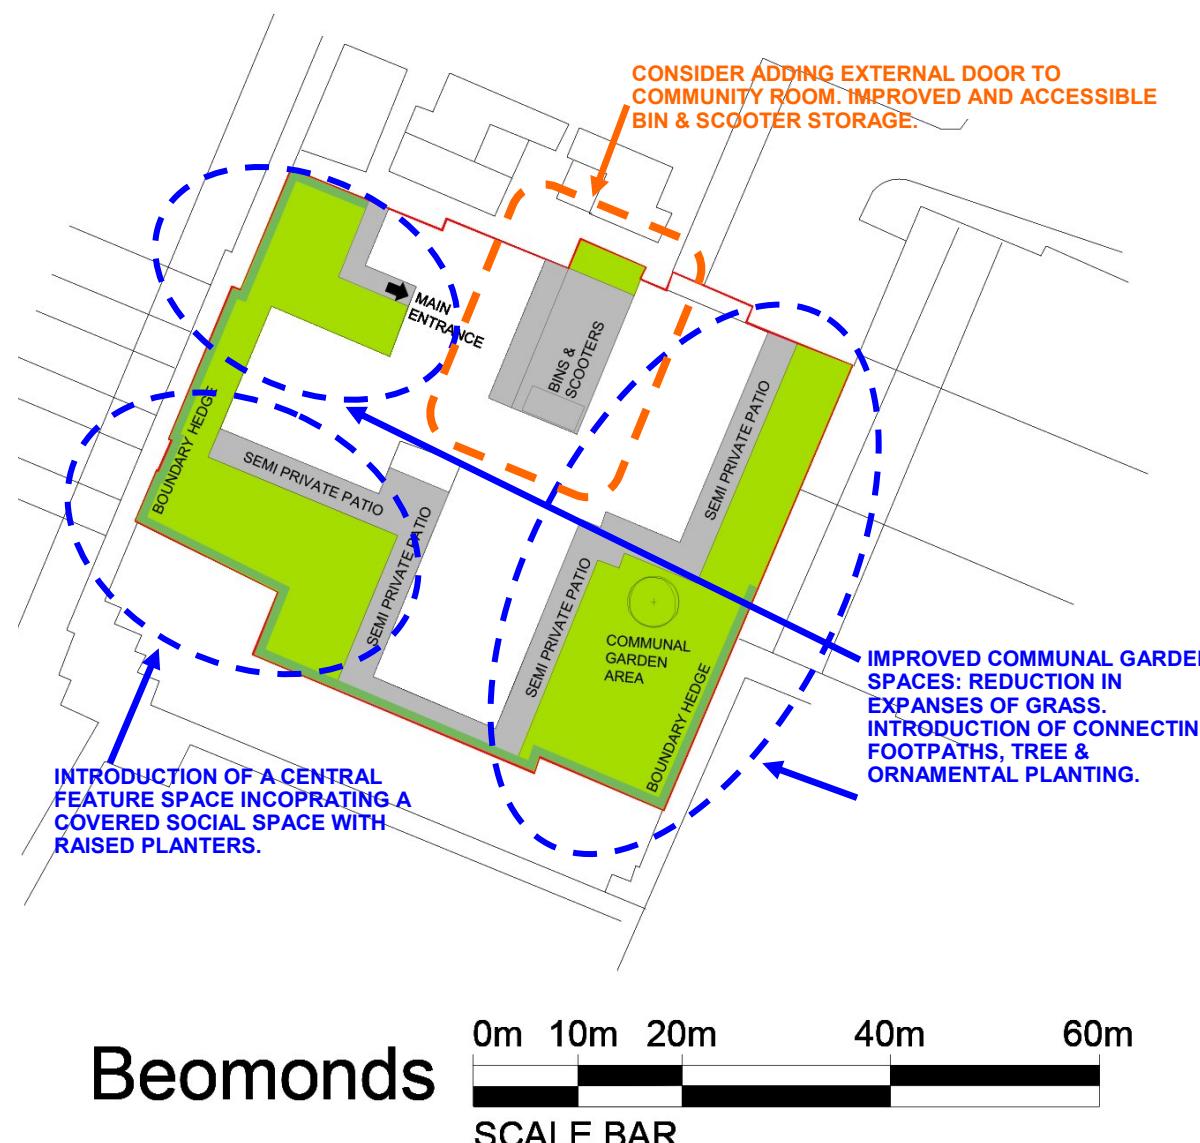

Beomonds





#### 3.4 Beomonds

The site address is Beomonds, Heriot Road, Chertsey, Surrey, KT16 9BX


The home has 18 self contained flats.


- Internally in very good decorative order and lighting
- No decorative work required
- Brand development could be enhanced through new way finding signage, art work and colours for walls.
- It seems each flat has its own demarcated external area but there was no common / shared external social areas. Would be good to add points of interest.
- The external areas are pretty stark (like the surrounding areas) – slabs or grass. Would be good to add point of interest. For Initial ideas refer to landscape plans shown in section 2.4
- No external canopies to the balcony areas currently proposed.

Internal works to be discussed further—may include corporate branding to colour scheme and signage. Proposed plans not shown until scope agreed.



Aerial view looking North (record image)

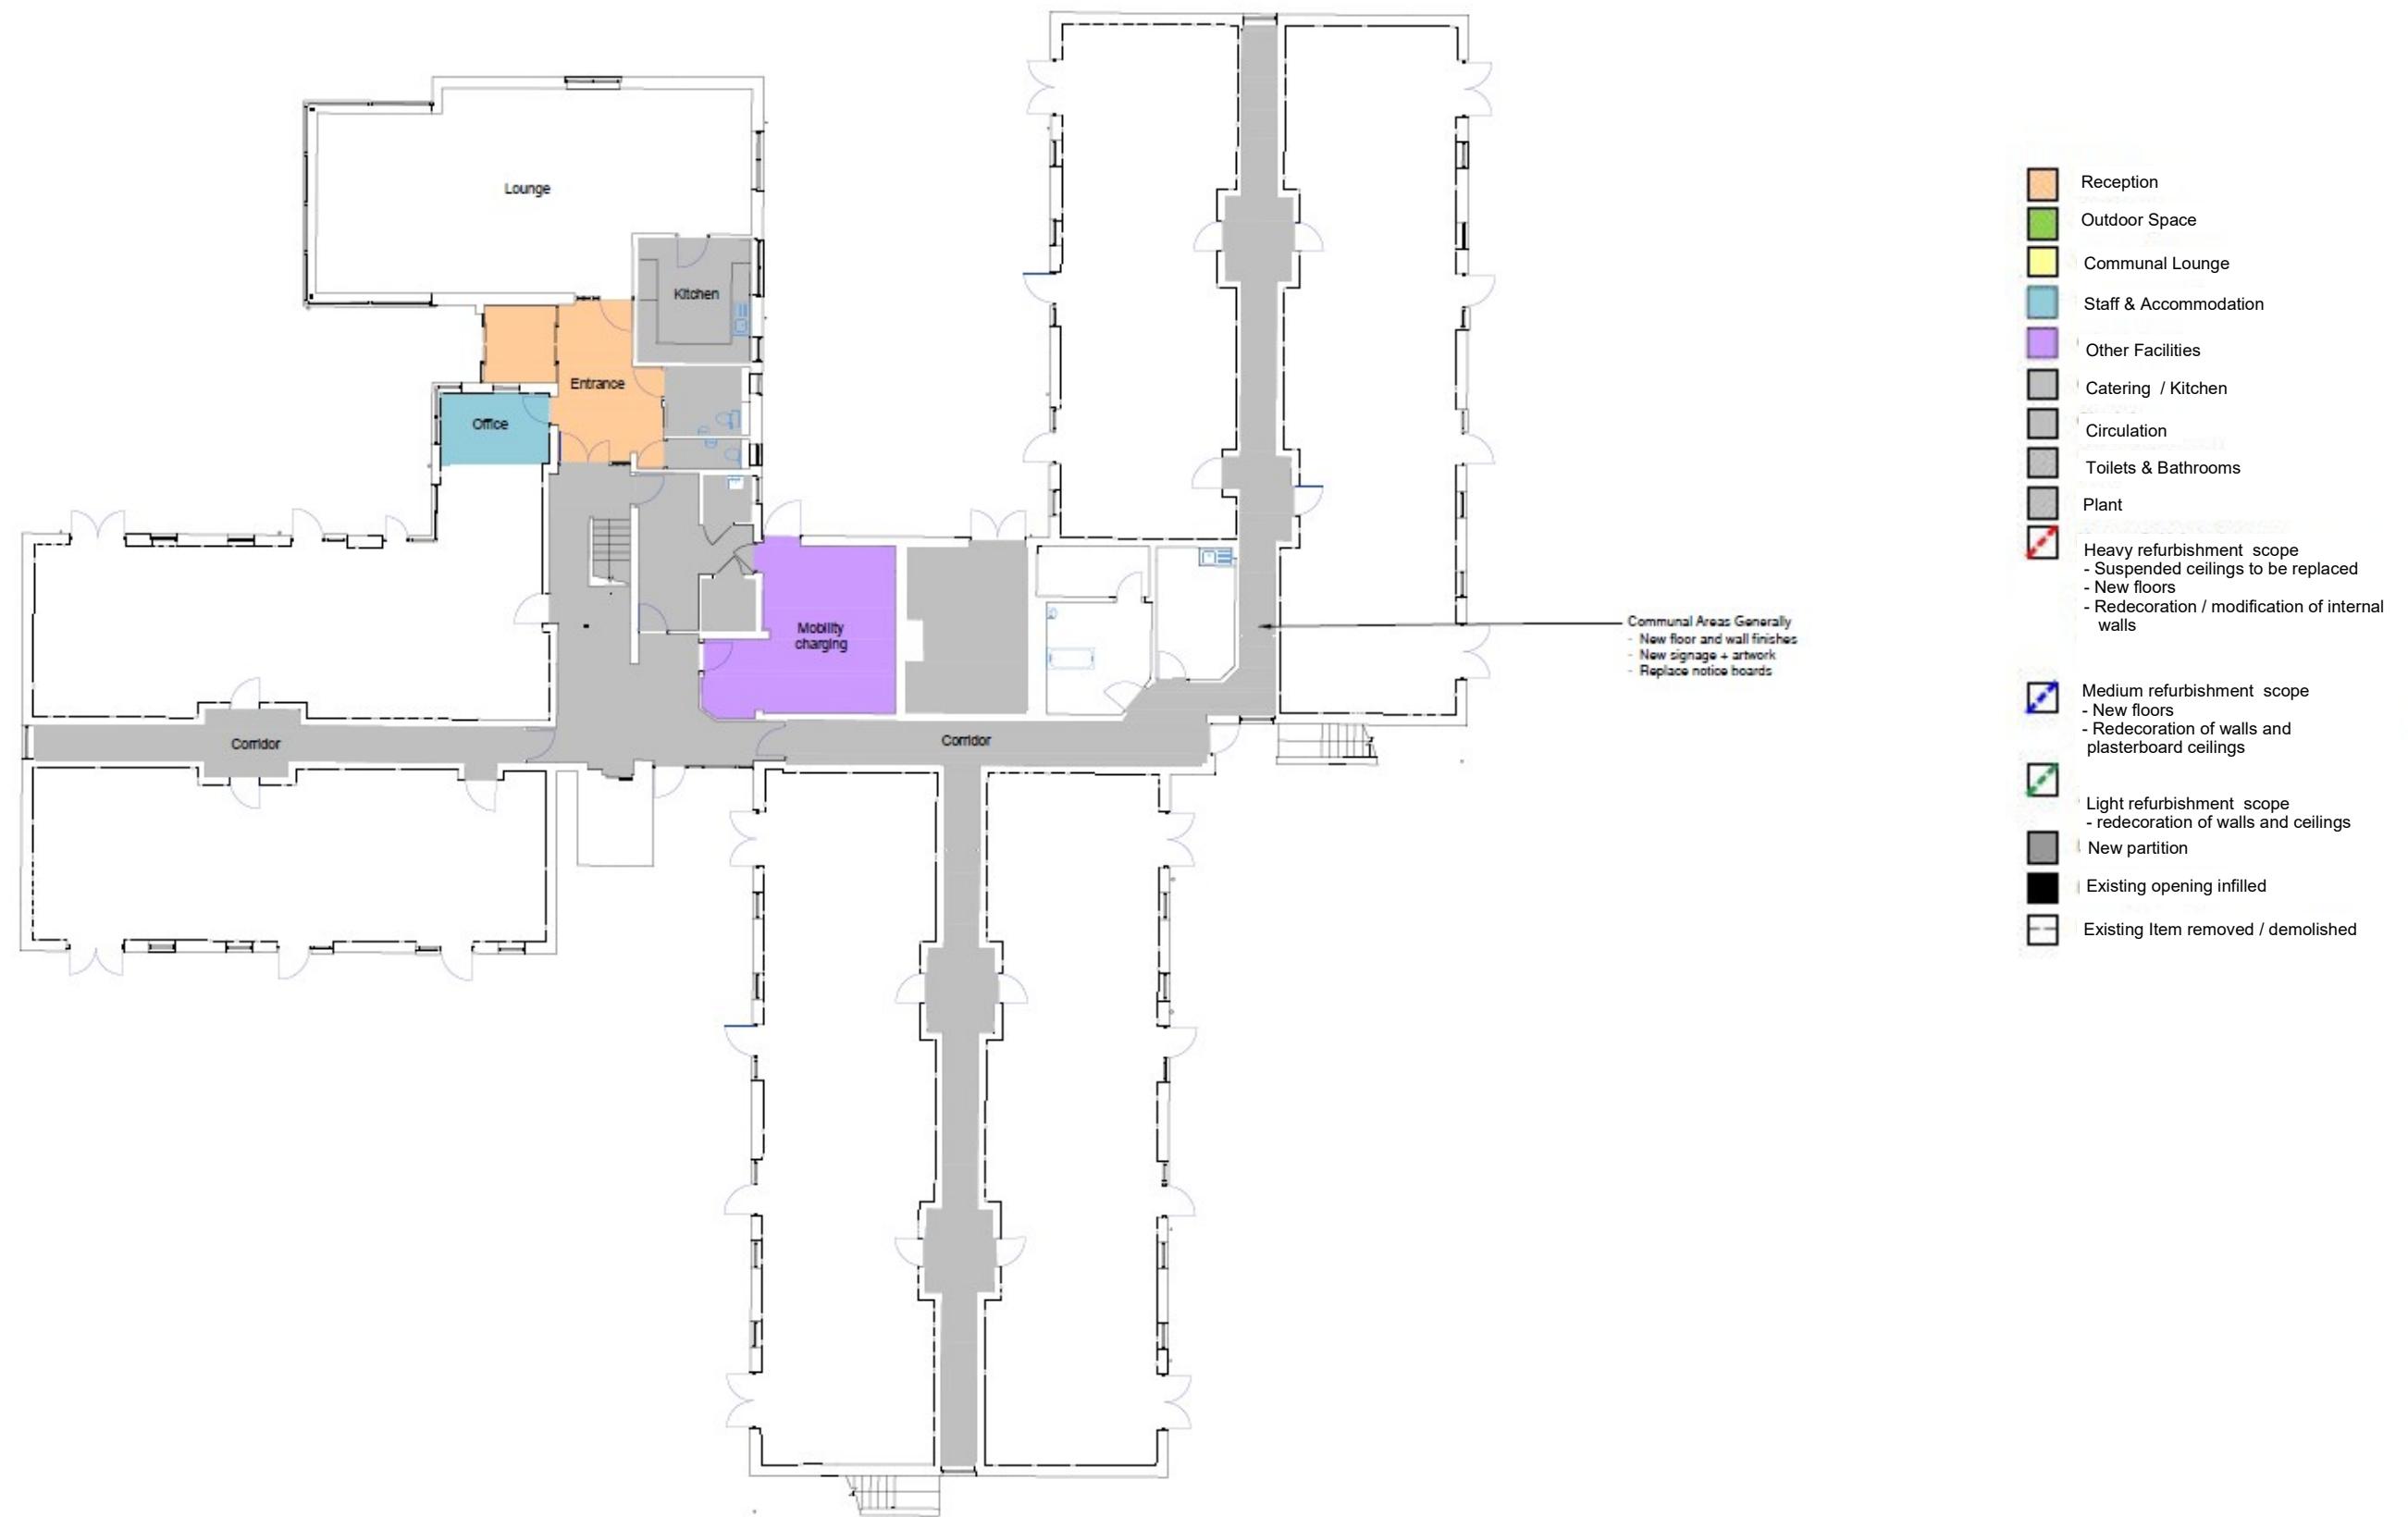


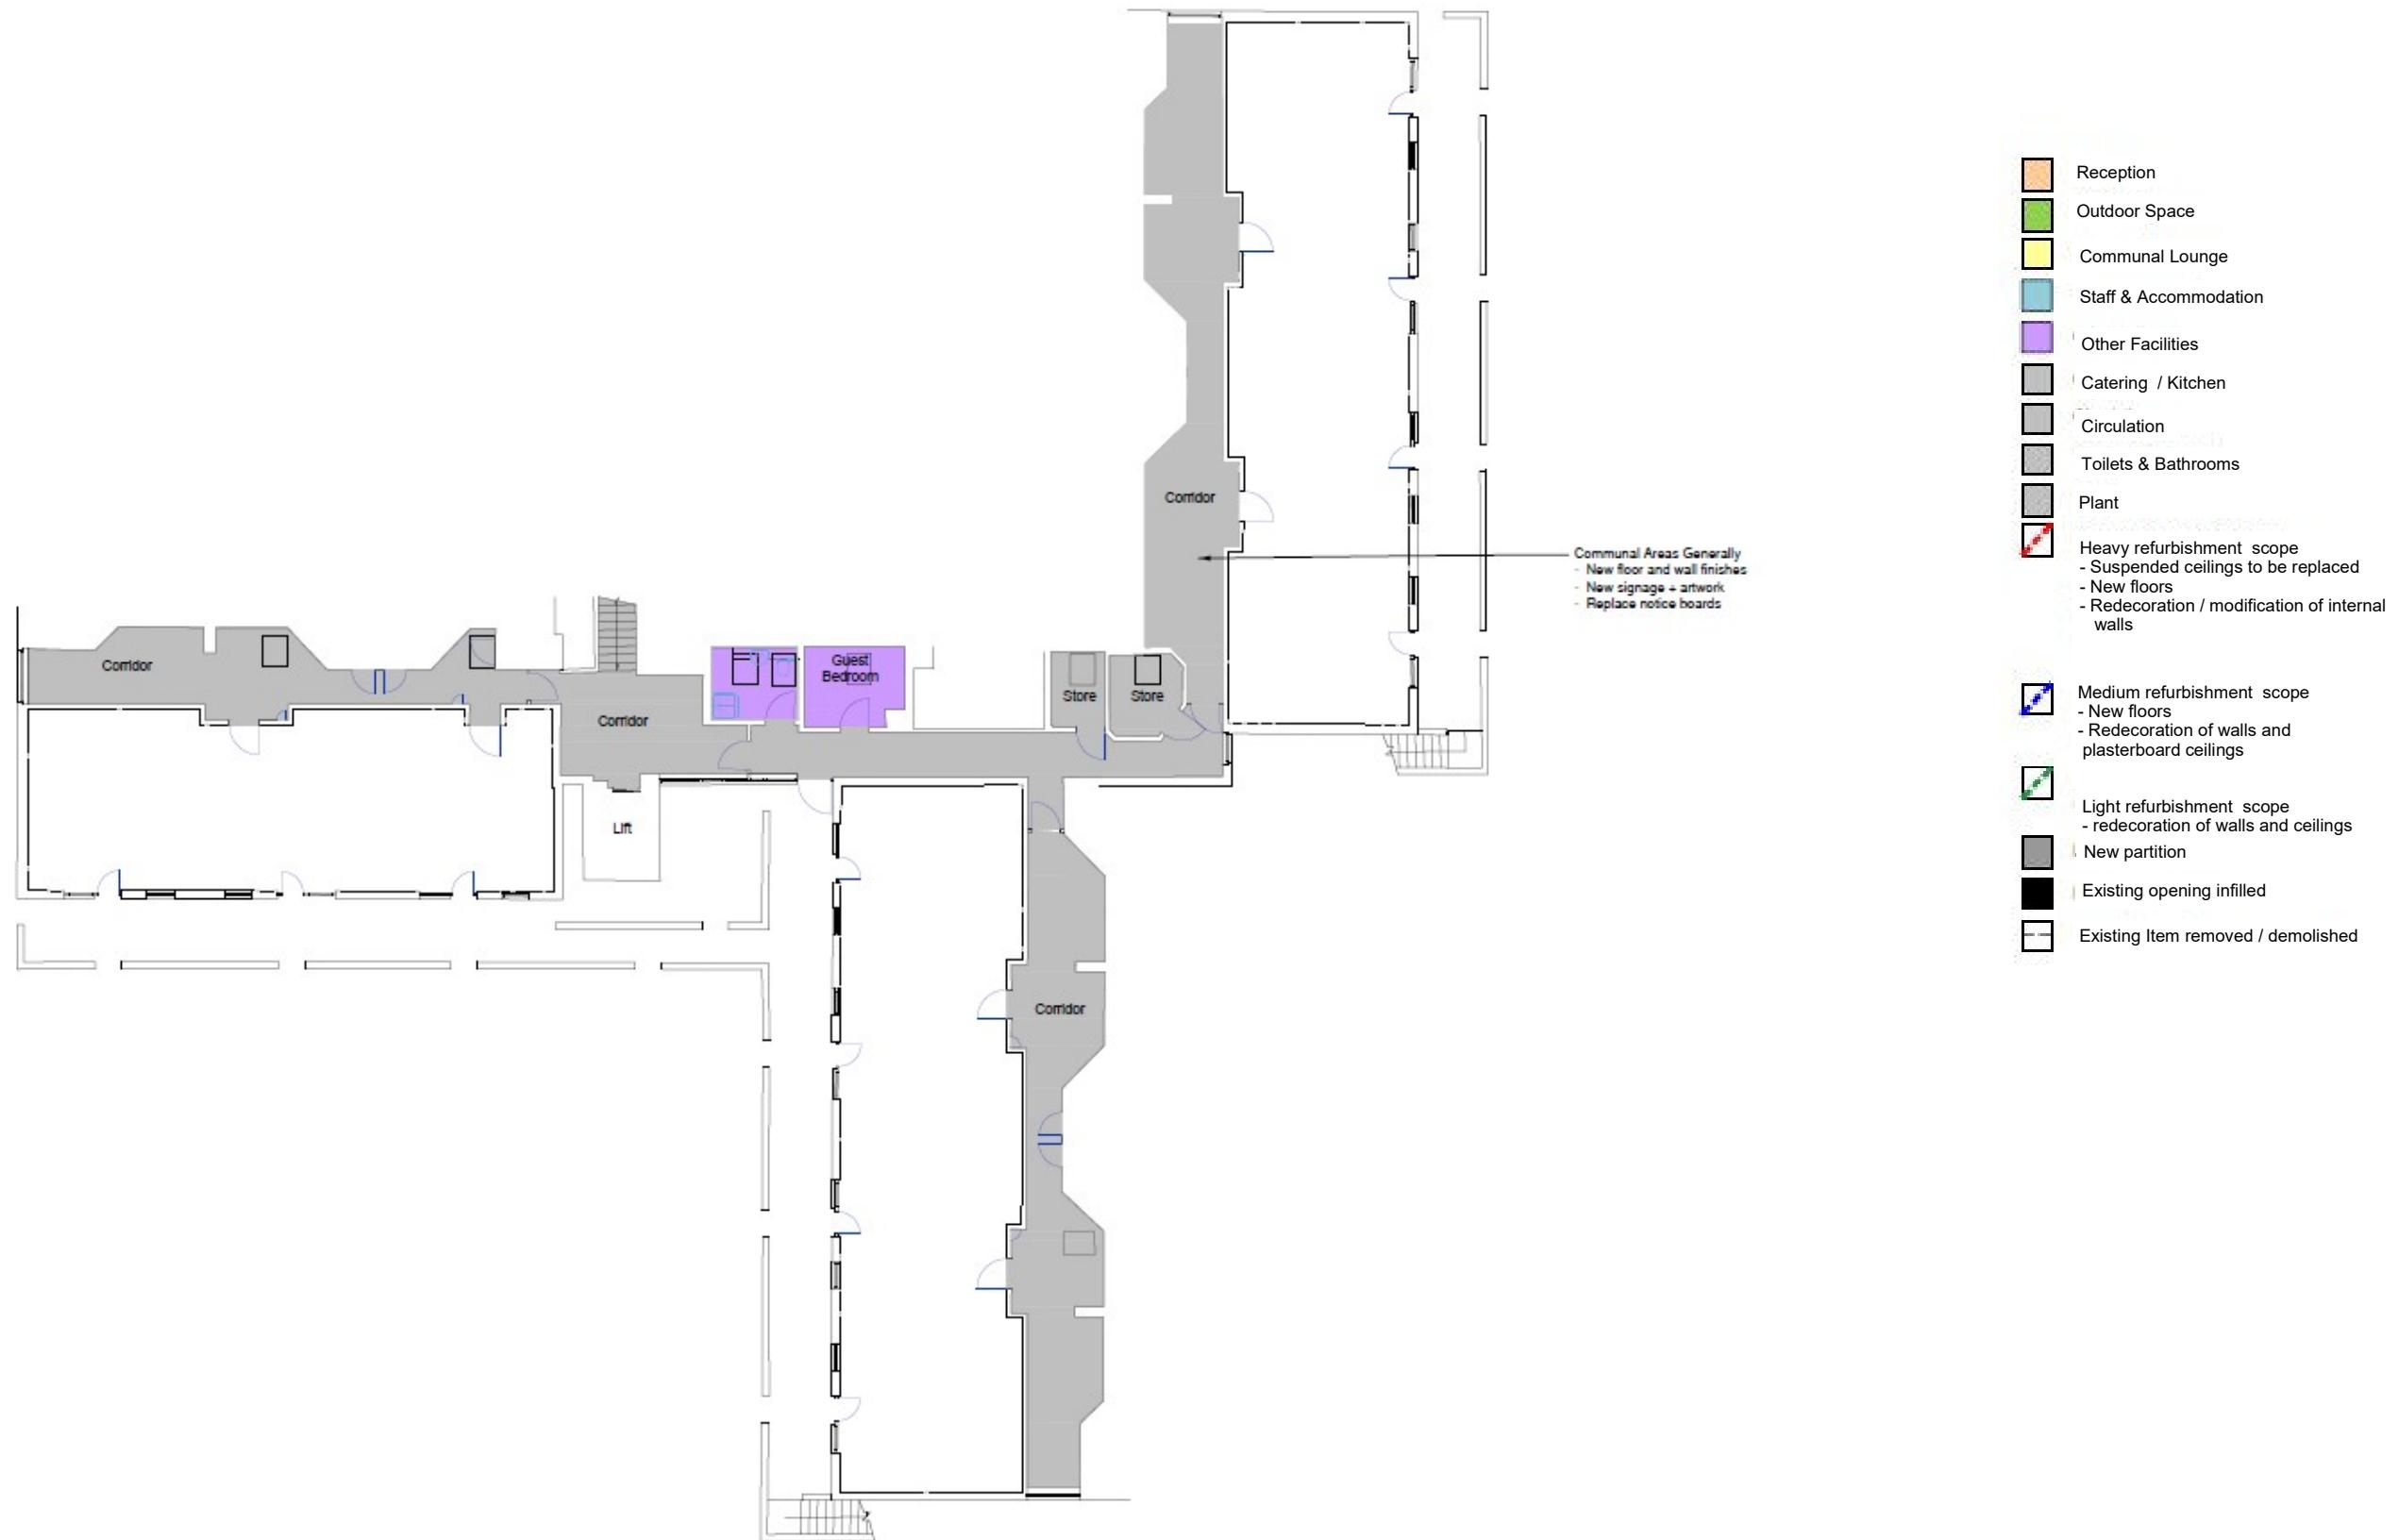



#### Site Photographs

1. Entrance lobby
2. Amenity space to rear
3. Lounge
4. Kitchen
5. Amenity space in courtyard
6. External Balconies
7. Typical corridor
8. Link corridor
9. Stairs
10. WC

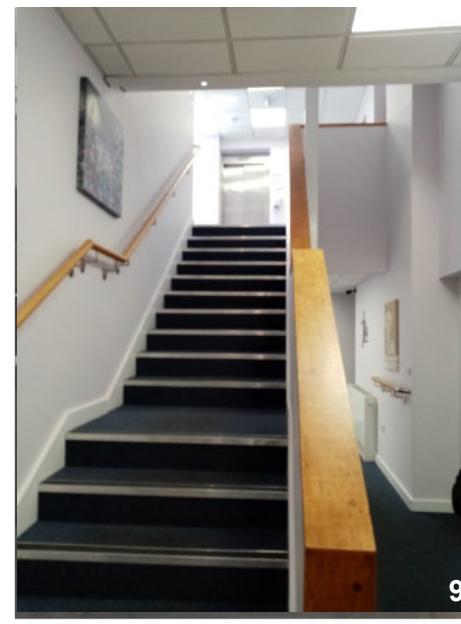



### 4.1 Conclusion

From the work undertaken to date the sites seems able to accommodate the clients brief.

This report sets out the proposed option available for each IRL home.


### 4.2 Recommendations and Next Steps

The next stages of the project will be to develop and sign off the client brief, develop the schemes based on survey information, review the scheme in relation to the site and update programme and costs.

The building design process is divided into stages as per the diagram opposite, which illustrates the progression from the initial inception of a project through to the development of the schematic design in increasing detail and realisation as a complete building. It also outlines the principal actions to be taken at each stage.

The next stage of the project will comprise:

- Development of proposed scheme from a review of the detailed operational needs, available budget and findings of this report
- Further dialogue/engagement with stakeholders/statutory consultees
- Review of publicly survey documentation and commissioning further surveys as needed.
- Cost analysis
- Review of required planning engagement

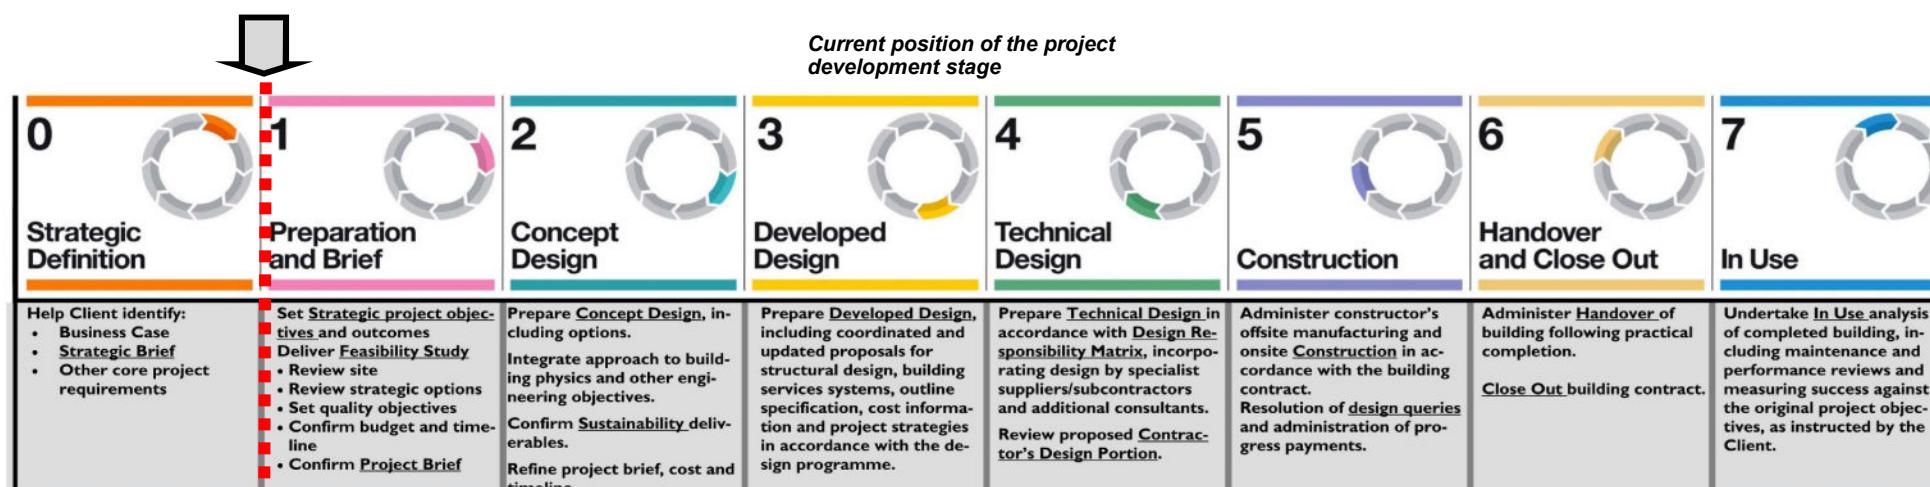

Diagrammatic Representation of the RIBA Design Stages



### 4.1 Conclusion

From the work undertaken to date the sites seems able to accommodate the clients brief.

This report sets out the proposed option available for each IRL home.


### 4.2 Recommendations and Next Steps

The next stages of the project will be to develop and sign off the client brief, develop the schemes based on survey information, review the scheme in relation to the site and update programme and costs.

The building design process is divided into stages as per the diagram opposite, which illustrates the progression from the initial inception of a project through to the development of the schematic design in increasing detail and realisation as a complete building. It also outlines the principal actions to be taken at each stage.

The next stage of the project will comprise:

- Development of proposed scheme from a review of the detailed operational needs, available budget and findings of this report
- Further dialogue/engagement with stakeholders/statutory consultees
- Review of publicly survey documentation and commissioning further surveys as needed.
- Cost analysis
- Review of required planning engagement

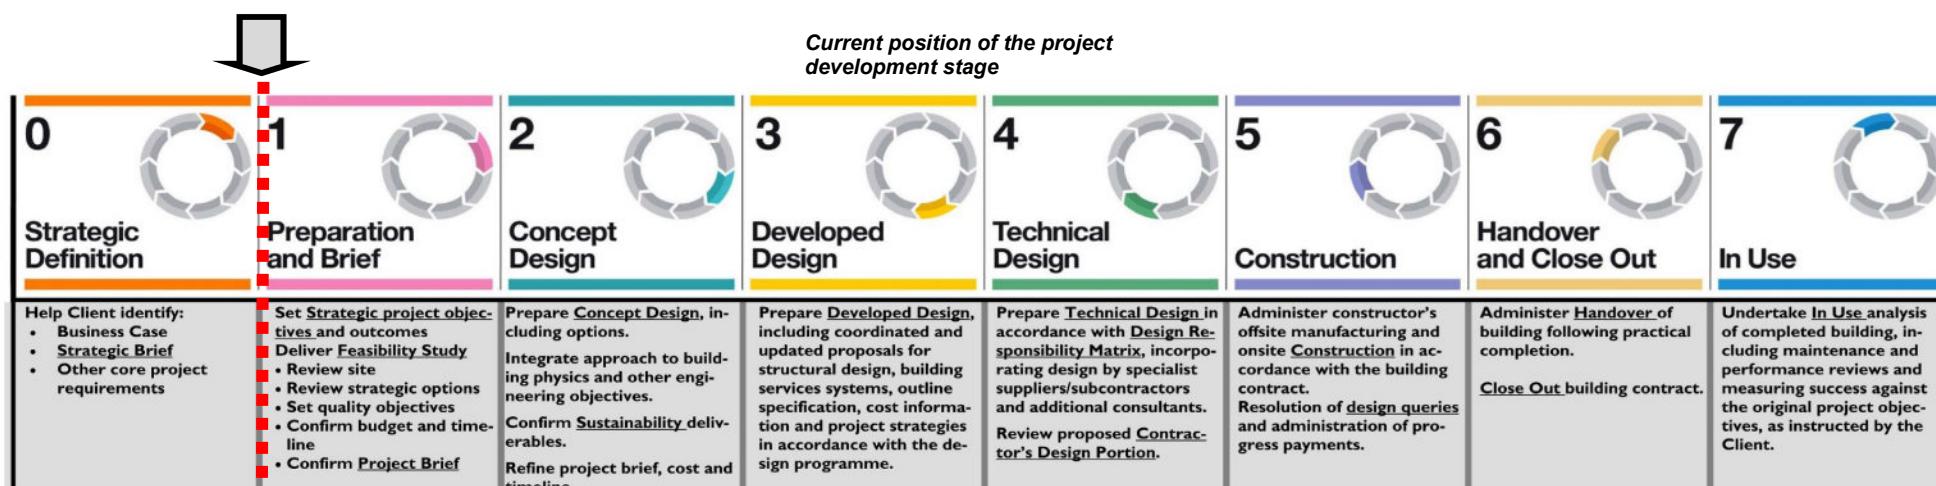

Diagrammatic Representation of the RIBA Design Stages